

Name **SPREADERLIGHT 12V**
 Number **N028**
 Collection **NAUTIC**

TEKNA

General


Location Indoor/outdoor
 Main material Brass/glass
 IP rating IP 44
 Class II/III
 Bathroom zone Zone 2
 Voltage 12V AC/DC
 Driver required No
 Cable length (m) Internal connection
 Dimensions (mm) W80mm - H130mm - D85,5mm.
 Mounting method Wall mounting
 Brut weight (kg) 1,5
 Gross weight (kg) 1
 Packing (mm) 180x150x90
 Energy Efficiency % A



Lamp

Included
 Light source LED Soraa Vivid 12VMR16 GU5,3
 Number of light sources .
 Socket type .
 Bulb shape .
 Max lamp length (mm) .
 Power consumption 9W
 Luminous Flux 490lm
 Color temperature 3000K
 CRI 95
 Lifetime .
 Beam angle .

FRONT VIEW

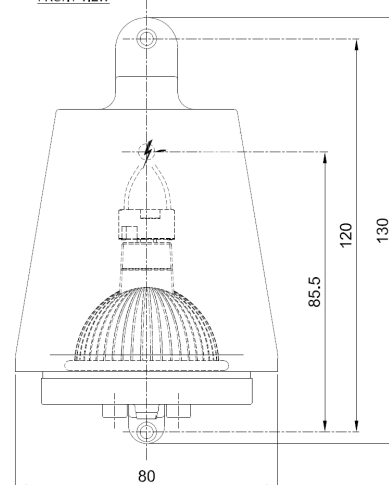

Electrical

Switched No
 Battery No
 Dimmable Yes
 Dimming range .
 Dimming method .
 Supply frequency DC
 Driver/ballast voltage 12V
 Efficiency .

Finishes

Dark Bronze
 Polished Brass
 Rough Dark Bronze
 Polished Chrome Plated Brass
 Brushed Chrome Plated Brass
 Acid Green

SIDE VIEW

