

Name **SPREADERLIGHT 12V**  
 Number **N028**  
 Collection **NAUTIC**

**TEKNA**


## General

Location Indoor/outdoor  
 Main material Brass/glass  
 IP rating IP 44  
 Class II/III  
 Bathroom zone Zone 2  
 Voltage 12V ac/dc  
 Driver Required No  
 Cable length ( m ) Internal connection  
 Dimensions ( mm / W-H-D ) W80mm - H130mm - D85,5mm.  
 Mounting method Wall mounting  
 Brut weight (kg) 1,5  
 Gross weight (kg) 1  
 Packing (mm / W-H-D ) 180x150x90  
 Energy Efficiency % A



## Lamp

Included  
 Light source LED Soraa Vivid 12VMR16 GU5,3  
 Number of light sources .  
 Soket Type .  
 Bulb shape .  
 Max Lamp Length .  
 power consumption 9W  
 Luminous Flux 490lm  
 Colour Temp 3000K  
 CRI 95  
 Lifetime .  
 Beam angle .

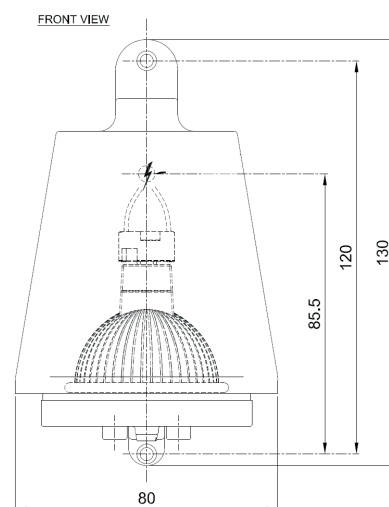

## Electrical

Switched No  
 Battery No  
 Dimmible Yes  
 Dimming Range .  
 Dimming method .  
 Supply Frequency DC  
 Driver/Ballast Voltage 12V  
 Efficacy .

## Finishes

Dark Bronze  
 Polished Brass  
 Rough Dark Bronze  
 Polished Chrome Plated Brass  
 Brushed Chrome Plated Brass  
 Acid Green

